# **INTERPASS**

# DA +

**Duress Alert Systems** 



The DA Plus by Interpass is a new take on duress alert systems, allowing not only an audible alert but a visual geographical display of the duress location reporting in both text and map animations without the dependency or complexity of management software.

This level of interface allow duress problem sources to be identified and addressed quicker than ever before.

The DA Plus has been built with flexibility in mind to allow full site by site customisation of display outputs, allowing maps and duress points to fit in with each customer's unique needs.

#### **FEATURES:**


- Maps and animations customized per individual site requirements.
- Display output via Coax digital broadcast to allow integration with any digital tuner display and even accommodate integration with existing "antenna" cable infrastructure.
- ▶ HDMI option at no cost.
- Display output via embedded webpage over Fixed I.P. or Wi-Fi (option).
- Power fail redundancy via battery backup.
- Direct integration with Tecom Challenger
  10 hardware & other 3<sup>rd</sup> party devices.
- Ability to filter and control I.P. traffic allowing isolation from network or integration as specified.

- Expandable to suit the needs of the site.
- Solid state hardware requiring minimal maintenance.
- Wireless or fixed-point alarm activation (C10).
- Other 3<sup>rd</sup> party interfaces available.



**WIRELESS** 



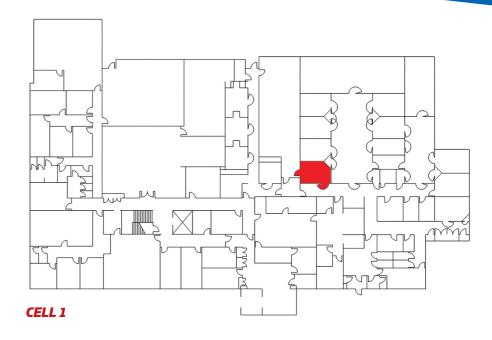

## **HARDWARE SPECIFICATIONS**

| DIMENSIONS |                                   |
|------------|-----------------------------------|
| Height     | 450mm                             |
| Width      | 340mm                             |
| Depth      | 70mm                              |
| Weight     | 5.9Kg (8.1Kg with battery fitted) |

| POWER           |                          |
|-----------------|--------------------------|
| AC Voltage      | 240VAC (Range 90-264VAC) |
| AC Current      | 2.8A Max (1.5A Average)  |
| Frequency Range | 47~63Hz                  |
| Working Temp    | -20 ~ +70c               |

| $\mathbf{n}$ |            | ΓΔ | III |   |  |
|--------------|------------|----|-----|---|--|
|              | / <u> </u> |    |     | - |  |

Integration with Challenger Event Print over Serial

| VIDEO OUTPUT                         |                       |  |  |  |
|--------------------------------------|-----------------------|--|--|--|
| Video OUT                            | DTV over Coax or HDMI |  |  |  |
| Output Channel                       | 69 (can be altered)   |  |  |  |
| Output Connector                     | F type                |  |  |  |
| Output Level                         | 85dBuV                |  |  |  |
| Output Level Adjustment              | 20 dB typ.            |  |  |  |
| Service agent replaceable components |                       |  |  |  |
| IPA module (ordered site specific)   |                       |  |  |  |
| Router (Ordered site specific)       |                       |  |  |  |
| Resi-linx Modulator (Preconfigured)  |                       |  |  |  |
| Power Supply PSC-60A-C               |                       |  |  |  |
| Low voltage loom                     |                       |  |  |  |

## **APPROVED SALES / SERVICE AGENT**





**ABN** 22 600 759 055